


8 USB Driver Installation - Continued

1. When the USB installation is completed you will be asked to Reboot your PC. Depending on the Windows® Operating system you are using, the following screen may vary. After rebooting your PC resume your installation by, "Installing the Synchronization Software"



9 Install the Synchronization Software

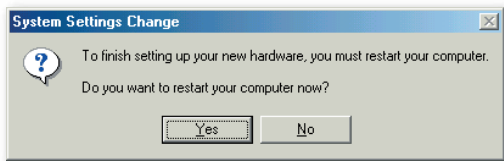

On the installation CD select - Step.3 "Installing the Synchronization Software"

NOTE: You may only install one synchronization software program on your PC. If you try to install both software programs you will get an error.


If you are a Microsoft® Outlook® user click on this Icon to install the software

If you Don't use Outlook and want to install the Qtopia Desktop Synchronization software click this Icon to install the software.

When you are finished installing your synchronization software you will be asked to reboot your computer once again.


10 Congratulations!

You are now ready to use your Zaurus SL-5500 and Synchronization Software. On the other side of this Quick Start Guide Sheet, there is information about how to use your Zaurus and software.

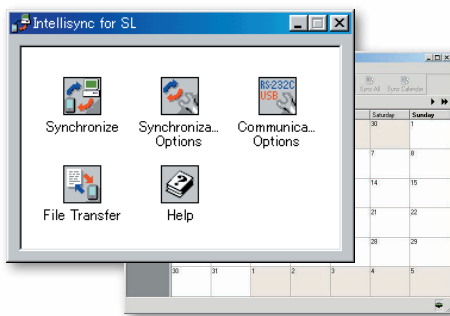

6 Docking the Zaurus

1. Open the Sharp I/O Port cover of the SL-5500 and slide the Zaurus into the Docking Station.
 2. Turn On the Zaurus by pressing the On/Off key (Cancel Key).
- You are now ready to install the Zaurus Software.
- Important:** Make sure that your Zaurus is Powered On during this part of the installation to insure that your PC finds your device.

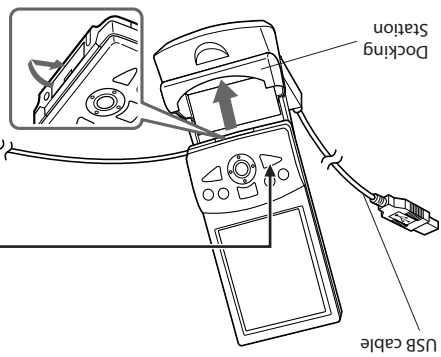


5 Disconnecting the Zaurus & Connecting the Power to the Docking Station

1. Disconnect the Zaurus from the AC adapter.
 2. Connect the AC adapter to the Docking Station.
-

7 USB Driver Installation

- Make sure that your Zaurus is Powered On during this part of the installation to insure that your PC finds your device.**
1. Turn on your PC and insert the Zaurus installation CD into your CD-ROM drive.
 2. Plug the USB connector of the Docking Station into the USB port of your computer.
 3. Either "Found New Hardware Wizard" or "Add New Hardware Wizard" dialog box will appear notifying you if you want to install the device.
 4. Follow the Wizard until both the Network and TCP/IP drivers are installed.

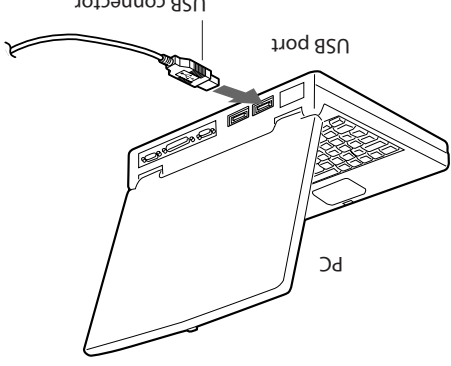

SHARP Zaurus Quick Start Guide - Read This First

Congratulations on your new purchase of the Sharp Zaurus SL-5500!


The Zaurus SL-5500 is a new exciting PDA from Sharp with exceptional Personal Information Management, Mobile Communications and Mobile Multimedia tools.

You must prepare your Zaurus SL-5500 before you install your Zaurus software. Please follow this Quick Start Guide, which will walk you through the installation of your Zaurus.

This Quick Start Guide is for experienced users of PC's or handheld PDA's and is not intended to be used in place of the manuals supplied with your Zaurus. If at any time you are not sure how to setup your Zaurus, please refer to the Start-up Guide and Operation Manual the came with your Zaurus.



1 Opening the Battery Compartment Lid

1. On the back of the Zaurus, slide the battery replacement switch to the "REPLACE BATTERY" position.
2. Gently slide replacement battery compartment lid to the right and remove it from the Zaurus.



2 Install the Lithium Ion Battery



1. Insert the battery on the ribbon tab making sure that the triangle, plus (+) and minus (-) signs on the battery match the markings on the inside of the Zaurus.
2. Replace the battery compartment lid with the ribbon tab inside.
3. Slide the battery replacement switch to the "NORMAL OPERATION" position.
4. When using the battery for the first time make sure you charge the unit for 24 hours.

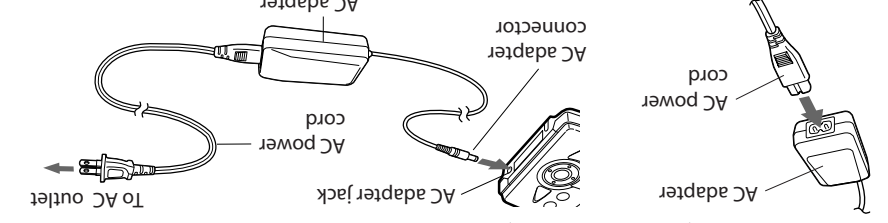

1. Connect the AC Power Cord to the AC Adapter.
 2. Connect the AC adapter to the Zaurus.
 3. Plug the AC Power Cord into an AC Outlet.
 4. The Amber LED will begin to glow indicating that the Zaurus is charging.
 5. Turn On the Zaurus by pressing the On/Off key (Cancel Key).
- If the battery level is low, the power will not turn on even if you attach the AC adapter. Charge the battery to its full capacity.

4 Welcome Screen & Entering Personal Information


1. After the Welcome screen appears, tap on the screen to go to the calibration screen.
2. At the calibration screen, tap on the cross hairs to calibrate the touch screen panel.
3. Set the **System Time** of the Zaurus by entering the appropriate time zone information. When finished tap on the Next button.
4. Using the keyboard of the Zaurus, enter your **Personal Details**. When finished tap on the Next button.
5. If you want to enter a Passcode for **Security** purposes, enter a passcode. (See Start-up Guide for details.) When finished tap on the Finished button.
6. When you are finished with the Personal Information setup you will see the Home screen.
7. Turn Off your Zaurus by holding down the On/Off key (Cancel Key).

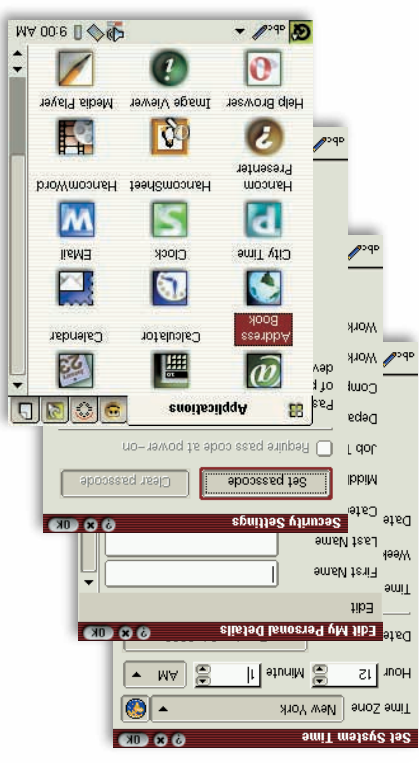


1. Connect the AC Power Cord to the AC Adapter.
 2. Connect the AC adapter to the Zaurus.
 3. Plug the AC Power Cord into an AC Outlet.
 4. The Amber LED will begin to glow indicating that the Zaurus is charging.
 5. Turn On the Zaurus by pressing the On/Off key (Cancel Key).
- If the battery level is low, the power will not turn on even if you attach the AC adapter. Charge the battery to its full capacity.

Zaurus

SL-5500

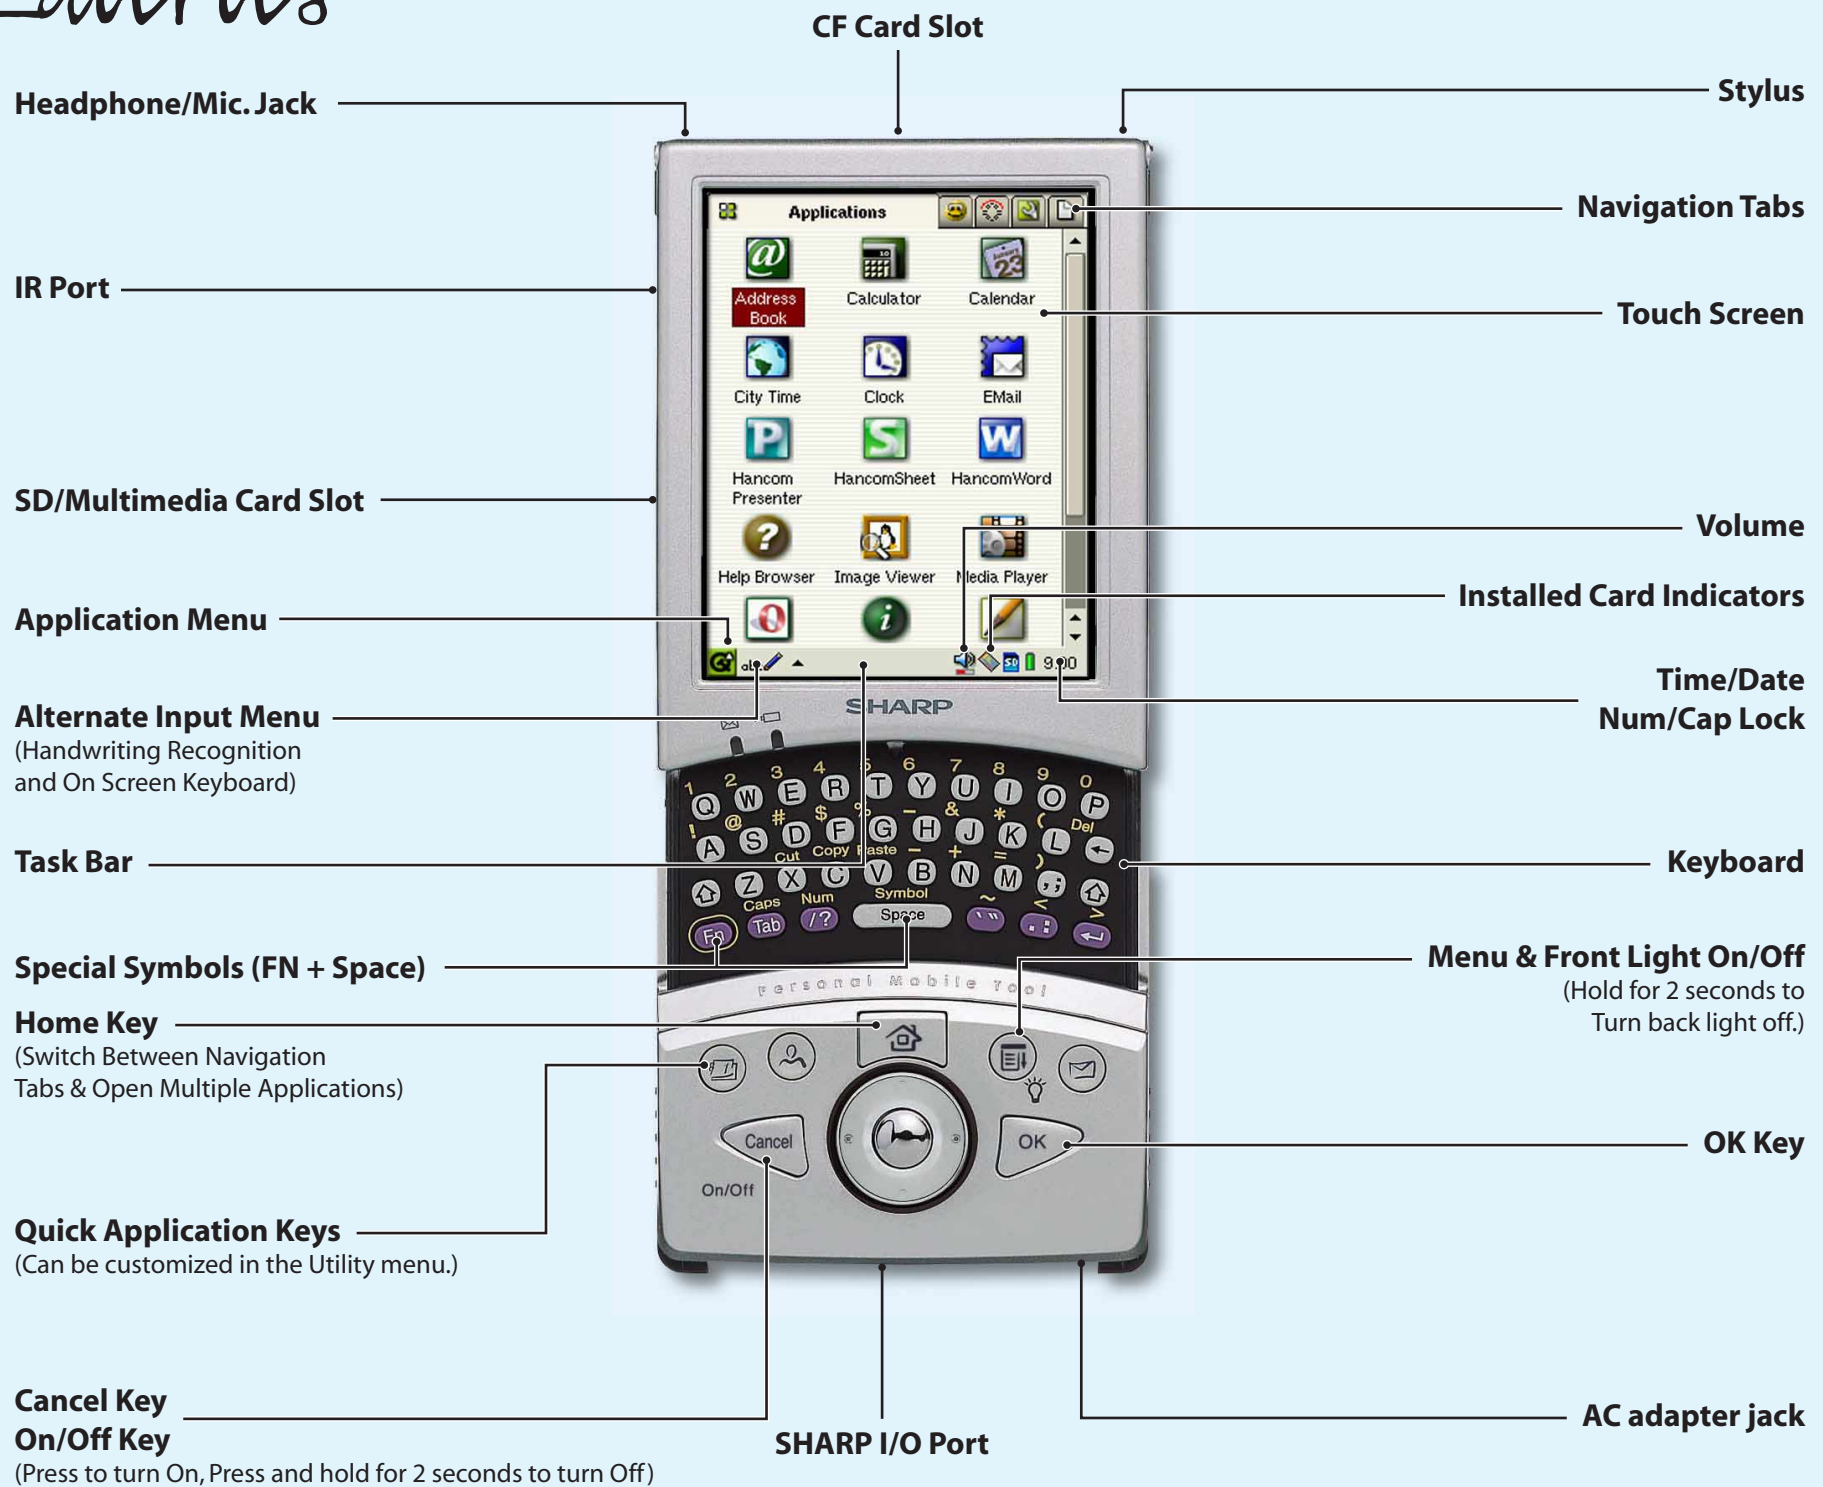

Main Navigation Tab Menus

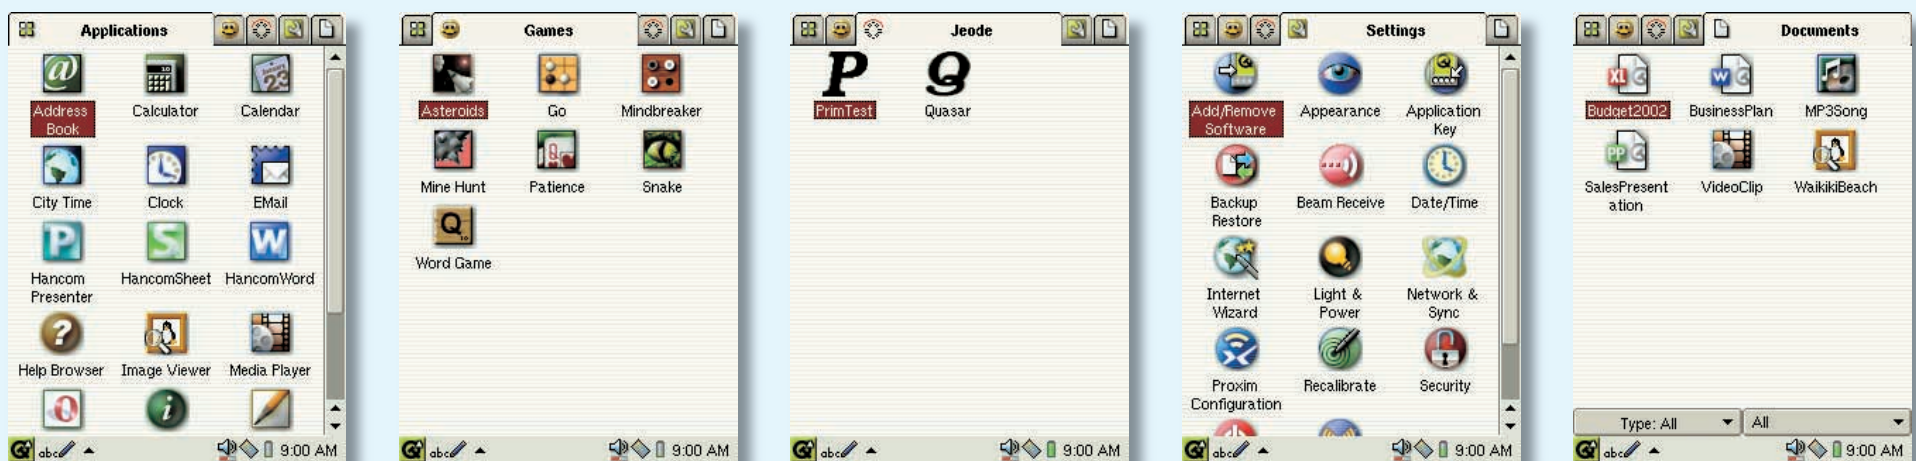


Address Book

To quickly find a contact, just type the first few letters on the keyboard.




Calendar

Switch to different views by selecting the view tabs.

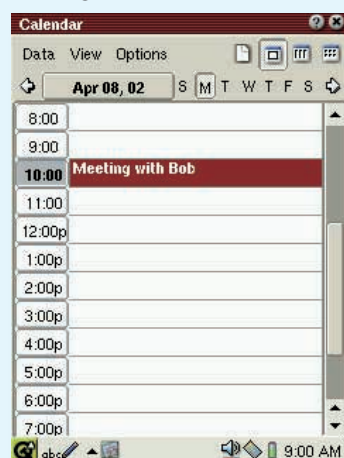

E-Mail

Sync or use optional modems to View e-mails.

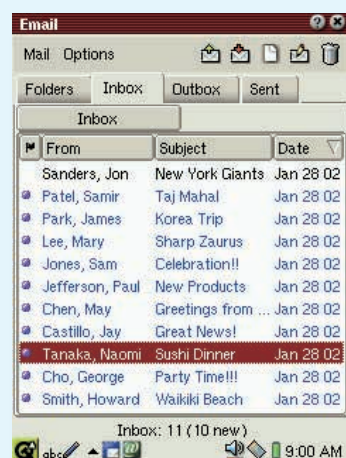


City Time

Select different time zones. The calendar automatically updates times.



Media Player

Copy MP3's and MPEG-1's to your Zaurus and create play lists.

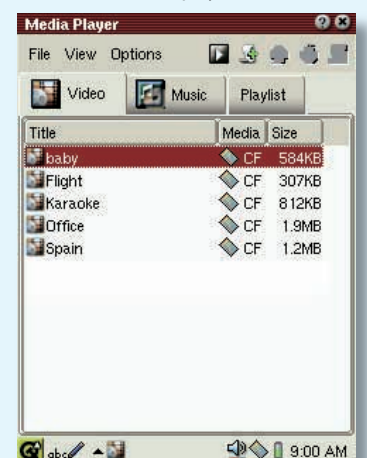

SHARP